

# TPT CHAMBER 3

## DATASHEET R1-TPT3-1019

### HYPERBARIC CHAMBER SPECIFICATIONS

Internal chamber diameter	900mm
Internal chamber length	3,500mm
Maximum pressure rating	150 bar/2,175 psi
Working temperature	Ambient
Maximum water depth	1,500m
Chamber orientation	Horizontal

Tyne Pressure Testing customers have access to the following range of services and benefits, in addition to their selected testing service:


- Complimentary use of customer offices, breakout areas and conferencing facilities
- Remote access to chambers within our technical control room
- Access to multi-chamber testing to reduce lead times
- Independent facilities hire or full turnkey service
- Logistics and storage
- Research from one of the UK's leading universities

### CHAMBER PENETRATIONS

As part of our service offering we can design and machine bespoke chamber connections to meet our customers' testing requirements. Our chambers can make electrical, hydraulic, mechanical and data connections.

Number	Size (inches)	Size (mm)
5	Ø2.00	Ø51
1	Ø10.12	Ø257
1	Ø12.00	Ø304

enquiry@tynepressuretesting.com | +44 (0) 191 209 7490  
[www.tynepressuretesting.com](http://www.tynepressuretesting.com)

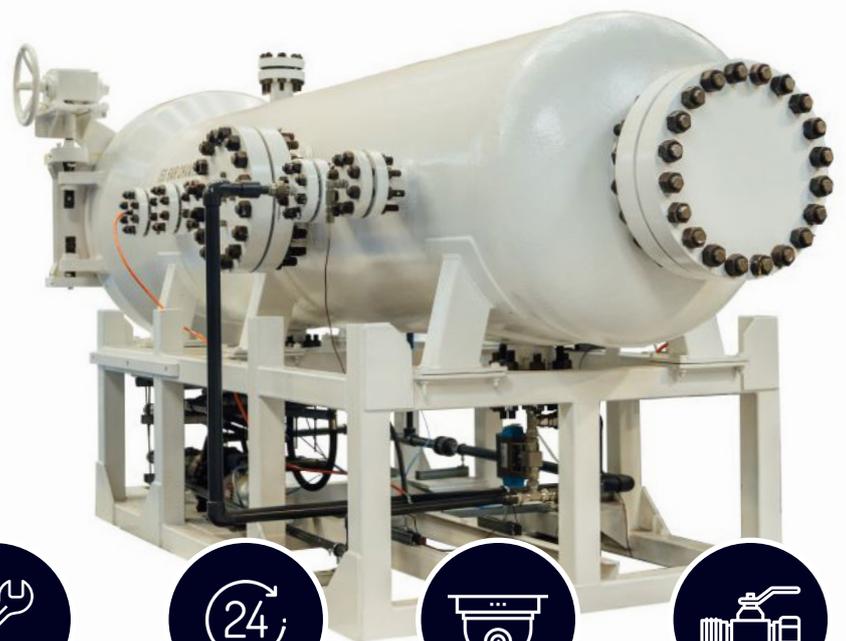

FULL ELECTRONIC  
REPORT OF ALL TEST  
DATA



50 TONNE  
OVERHEAD  
LIFTING CAPACITY



BESPOKE  
PENETRATIONS  
(ELECTRICAL, MECHANICAL,  
HYDRAULIC AND DATA)



24 HOUR TURNKEY  
OR INDEPENDENT  
TESTING



SUBSEA CAMERAS  
FOR LIVE VIDEO  
FEEDBACK



IDEAL FOR TESTING  
BALL VALVES AND  
ACTUATORS